

2.4G Active RFID Acousto-optic Tag With Light & Sound Clip

1. About RFID

Radio frequency identification: an automatic identification technology that uses radio frequency signals to achieve contactless information transmission through spatial coupling (alternating magnetic field or electromagnetic field), and uses the transmitted information to achieve identification purposes.

2. Product appearance



3. Product overview

PA66 acousto-optic clips can have multiple operating frequencies. 2.4GHz can recognize from a distance, making it more secure. Tag card spontaneous emission and feedback signal

4. Product Features

- ✓ Reading and writing speed: Compared with barcodes, it does not require straight line alignment for scanning, and has faster reading and writing speed. It can recognize multiple targets and motion.
- ✓ Security: Encryption algorithms and authentication to prevent link eavesdropping and data cracking.
- ✓ Specialized chips, unique serial numbers, and difficult to replicate. Durability without mechanical failure.
- ✓ Tag ID number: 10 bytes;
- ✓ Label type: read-only;
- ✓ Duration of use: With a large battery capacity, it can be recharged repeatedly;
- ✓ Reading distance: The reading distance is far;
- ✓ Anti collision capability: Advanced anti-collision technology can simultaneously recognize more than 200 tags;
- ✓ High speed recognition: The maximum recognition speed can reach 50 kilometers per hour;
- ✓ High anti-interference ability: No special requirements for various interference sources on site;
- ✓ Anti electromagnetic interference: 10V/m0.1~1000MHz AM amplitude modulated electromagnetic waves;
- ✓ Installation method: clamp fixed items;

5. Parameter specifications

Physical parameters	
Size	56mm×31mm×31mm
Material	ABS
Weight	≈17g
Environmental parameters	
Working humidity	<85%
Operation temperature	-15 ~ 55℃
Storage temperature	-20 ~60℃
Performance parameter	
Static current	<5uA
Working voltage	3V
Battery	Cr2450
Working current	12mA (pulse mode)
Signal interval	Every 3 seconds
Collision ability	>2000PCS
Reading method	Read-only nature
Transmission power	4dBm (factory setting)
Recognized distance	30 meters visible distance
Light search function	Yes (color adjustable)
Horn alarm function	have
Usage time	1 year

Send data to tags (send text messages, send alarm instructions)

Data format: Character type

Length: indefinite

New field format (20 digits):	Instruction Example
Time, Light Color, Activation Style, Light Effect Style, Sound Effect Style The format is as follows T00003_000011_00_1_1 Time: 5 digits, range 00000 to 65535, unit: seconds Light color: 6-digit,	#SET_TAG_DATA 0002-2299999999 T 00030_100000_10_3_3 1 2 3 4 5 6 7 8 9 1# SET_TAG_daTA instruction name 2. 0002 Write Label Command 3. 2299999999 label number 4. T Function Identification 5. The reminder time for 00030 is 30 seconds, with a value range of 00003~65535 6. 100000 lights, 3 primary colors RGB, with a value range of 000000~FFFFFF, Black 000000 White FFFFFFFF Red FF0000 Green 00FF00 Blue 0000FF 7. 10 switch sensing sensitivity, with a value range of 00~1F, 00 is most sensitive, 1F is least sensitive 8. 3 The range of lighting styles is 0~F, 0 is none, 1 is long on, 2 is single on, and 3~F is strobe 9. 3 sound styles with a range of 0~F, 0 without 1 long sound, 2 single sound, 3~F frequency response

RGB range
000000~FFFFFF
Activation style: 2
digits, sensing
threshold
00~1F/dismantling
alarm 00 off 01 on
Lamp effect style:
1 digit, 0 without 1
length, 2 single
flashes, 3 to F
flicker
Sound effect style:
1 digit, 0 without 1
length, 2 single
flashes, 3 to F
strobe


Example: # SET_TAG_DATA 0002-1230000001 10003 T00020_001100_10_4_4

T00020_001100_10_4_4	Green light buzzing
T00020_110000_10_4_4	Red light buzzing
T00020_000011_10_4_4	Blue light buzzing
T00020_111111_10_4_4	White light buzzing
T00020_111100_10_4_4	Yellow light buzzing
T00020_110011_10_4_4	Purple light buzzing
T00020_000000_10_4_4	Buzzing without flashing lights
000000_000000_10_4_4	Stop Alarm


1230000001 represents card number, 20 represents time alarm for 20 seconds

6. Antenna far-field pattern

Horizontal plane directional diagram

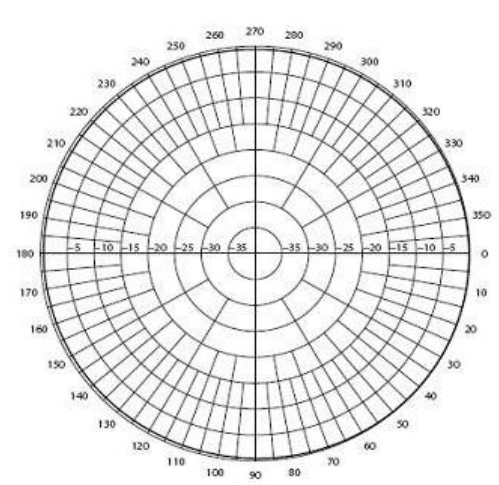

Vertical pattern

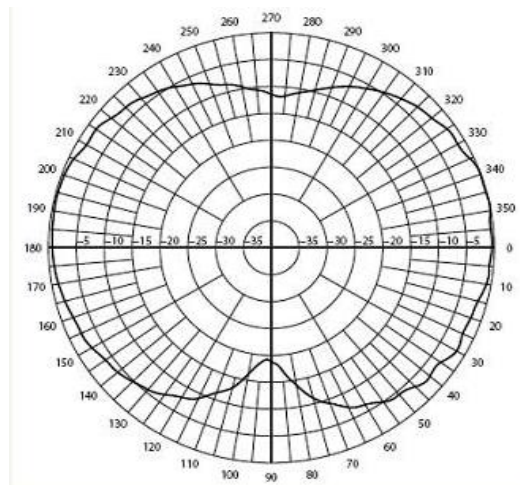

7. Definition of data format sent back by the card reader

Definition of Data Packet:

(1) Packet format (40 characters in total)

name	Head logo	Equipment number	Equipment date and time	Tag number	Sign position	Flag data	checksum
describe	#	hexadecimal	decimalism	decimalism	arbitrary	hexadecimal	*
Number of characters	1	8	12	10	1	6	2

(2) Detailed Introduction to Data Packages

No.	Definition	Describe
1	Head logo	'#'
2	Equipment ID7(H)	The content format of the lower 4 bits (H) of the checksum is hexadecimal character format The device type, device number, or site number can be modified by oneself (by entering the device management page, modifications can be made) (This data refers to the device number of the card reader, not the wristband number)
3	Equipment ID6(H)	
4	Equipment ID5(H)	
5	Equipment ID4(H)	
6	Equipment ID3(H)	
7	Equipment ID2(H)	
8	Equipment ID1(H)	
9	Equipment ID0(H)	
10	Annual high (D)	Content format: Decimal character format time Year Month Day Hour Minute Second
11	Annual low (D)	
12	Monthly high (D)	
13	Monthly low (D)	
14	Daily high (D)	
15	Daily low (D)	
16	Time high position (D)	
17	Time low position (D)	
18	Time low position (D)	
19	Split low (D)	
20	Second high position (D)	
21	Second low position (D)	
22	10th digit of card number (D)	Card number Content format: Decimal character format 2.4G card number for wristband
23	9th digit of card number (D)	
24	8th digit of card number (D)	
25	7th digit of card number (D)	
26	6th digit of card number (D)	
27	5th digit of card number (D)	
28	4th digit of card number (D)	
29	3th digit of card number (D)	
30	Second digit of card number (D)	
31	First digit of card number (D)	
32	Function indicator position(C)	Content format: Any character, uppercase symbol indicates normal battery

33	Label Data 1	level, lowercase symbol indicates low battery level
34		A/a: Positioning function, tag data 1 represents the low-frequency positioning address code collected by the tag,
35	Label Data 2	B/b: Remove the alarm function
36		S/s: Alarm function, label data 1 value of 01 indicates distress alarm, 02 indicates acceleration alarm H/s: Heart rate function, labeled data 1 represents the heart rate collected by the tag, and data 2 represents the blood oxygen value. (The highlighted part is not applicable to this product)
37	Label Data 3	RSSI signal strength value, with high half bytes 0-F indicating signal strength, ultra small values indicating strong signals, and low half bytes 1-4 indicating corresponding channel numbers
38		
39	The high 4 digits of the checksum (H)	Content format: Hexadecimal character format
40	The lower 4 bits of the checksum (H)	Check the sum byte, add up the hexadecimal values of the first 38 characters, and add the checksum value here. The merged sum byte value is zero

(3) Verification and Example:

For example: # 000000011504180808090022046518E9900007D

Based on the above example, the verification method for the checksum is as follows:

Serial Number	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	32	32	33	34	35	36	37	38	39	40
character	#	0	0	0	0	0	0	0	1	1	5	0	4	1	8	0	8	0	8	0	9	0	0	2	2	0	4	6	5	1	8	E	9	9	0	0	0	0	7	D
16radix	23	30	30	30	30	30	30	30	31	31	35	30	34	31	38	30	38	30	38	30	39	30	30	32	32	30	34	36	35	31	38	45	39	39	30	30	30	30	7D	
Calculation method	Checksum calculation: The sum of all hexadecimal values, with zero value for non bytes 23+30+30+30+30+30+30+30+30+31+31+35+30+34+31+38+30+38+30+38+30+39+30+30+32+32+30+34+36+35+31+38+45+39+39+30+30+30+30+7 D=800(The final byte of the merged value is 0)																																							

9. Precautions

- ✓ Do not put it into fire or store it in a high temperature environment exceeding 85 degrees Celsius for use!
- ✓ Do not use sharp objects to damage.
- ✓ Do not place it near corrosive objects.
- ✓ Do not arbitrarily change the parameters, specifications, and models of components during maintenance.
- ✓ Do not place labels in enclosed spaces.

- ✓ Do not forcefully and violently collide with the label.
- ✓ Do not use heavy objects or immense force to squeeze the label.

10. Application Fields

- ✓ Asset management
- ✓ Warehouse inventory
- ✓ Quickly search for items
- ✓ Personnel management