UHF RFID Sticker



Quick Details

LDR-2514L UHF RFID Sticker is compliant with EPC C1G2 (ISO18000-6C) standard and it fits for all 860-960mhz UHF RFID readers and antennas. Even though it's exquisite small size, it still can read up to 3meters, and it supports printing on printer by rolls. It mostly used for document management, manufacturing, digital storage and other high-end products traceability and security management.

Description

RFID Parameter	
Model No.	LDR-2514L
Type	Passive UHF RFID Sticker
Protocol	ISO/IEC 18000-6C, EPC Class1 Gen2
Frequency	Worldwide 840-960Mhz
Chip	Ucode9(Customized)
Memory	EPC 96bits
	TID 48bits
	User 0bits
Read&Write	Supported
Read Range	1-2.5m adjustable(reader and environment dependent)
Data retention	10years
Programming Cycles	100,000 cycles
Anti-collision	Yes
Physical Parameter	

+86 755 89379391 89379456 sales@leadercolor.com www.leadercolor.com
2F, Building A11, No.6 Xinfeng Road, Taizhong Industrial Zone, Longgang District, Shenzhen China 518172

Size	26×16mm
Substrate Material	Release paper
Antenna Material	Aluminum Etching
Surface Material	Coated Paper(Customized)
Installation	Self adhesive
Operating temperature	-25℃ ~ +65℃
Operating humidity	20% ~ 90%RH
Package	2000pcs/roll, 3000pcs/roll,customized
Customized	Chip / Antenna / Material / Glue / Printing / Craft

Applications

- Tracking challenging materials and objects
- Logistic and shipping labels
- File folder and document management
- Manufacturing and warehouse management

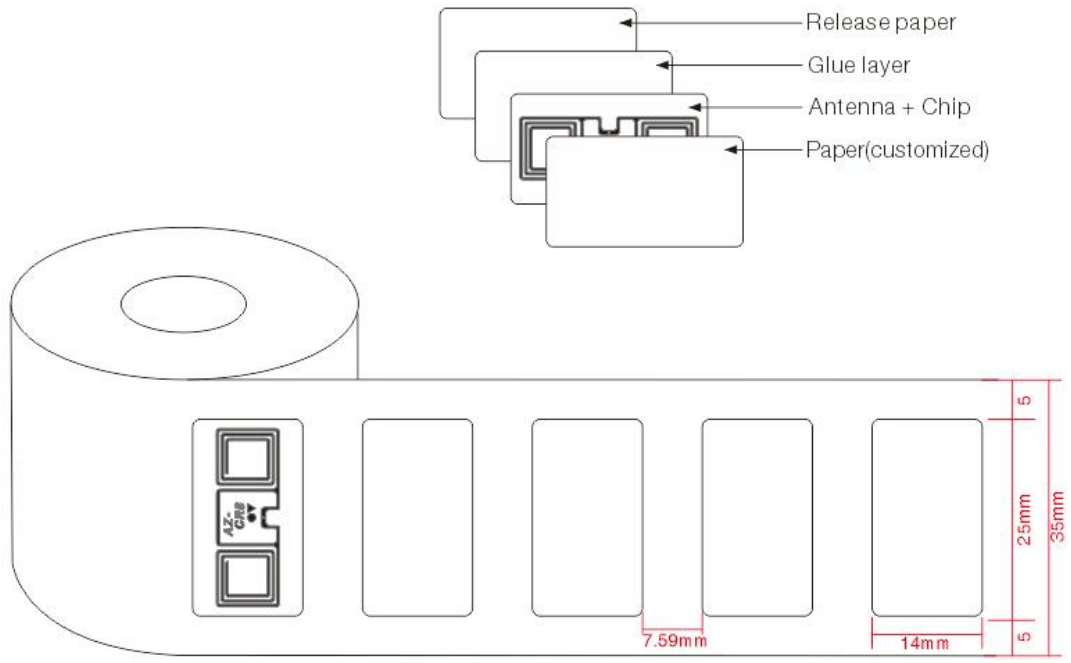

+86 755 89379391 89379456 sales@leadercolor.com www.leadercolor.com
2F, Building A11, No.6 Xinfeng Road, Taizhong Industrial Zone, Longgang District, Shenzhen China 518172